

AHD Reversing Camera - CT-AHDRC-01



Description:

Our High Quality AHD (Analog High Definition) Colour Reversing camera, uses the latest CMOS technology, the camera can produce high definition image with little distortion.

Analog High Definition is a high video definition standard transferred through a coaxial cable using analog modulation technology to transfer progressive-scan HD Video signal. AHD systems are same as traditional analog system, using common 75-3 coaxial cable to carry the signal as far as 500 meters without any video signal loss.

Specifications:

Model	CT-AHDRC-01
Pick up Device	1/4" CMOS Sensor AR0141
TV System	PAL
Picture Elements	1280(H)*720 (V)
Effective pixels	1.0M pixels
Day-night mode	External control (default) / Auto / color / black and white
Infrared Spectrum	850nm
S/N Ratio	More than 50 dB, (AGC Off)
Auto Gain Control	Auto
White Balance	Auto
Electronic Shutter	AUTO/ 1/50 (1/60) -1/100,000sec
Back Light Compensation	Auto
Infrared LED	18 LEDs
Infrared LED Range	8 m
Video output	1 Vp-p, 75Ω composite , 4 ways Din jack x1
Audio Output	N/A
Mirror	N/A
Power Consumption	200mA
Lens	Standard f3.6mm Fixed Megapixel Lens
Lens Mount	M12XP0.5mm Thread
Pan Adjusting	N/A
Tilt Adjusting	0-90°
Power Supply	12V DC ±10%
Dimensions(L x W x H)	W76 x H78 x D69 mm
Net Weight	280g
Weatherproof	IP67
Operating Temperature	-10°C to +50°C

**Specifications are subject to change without prior notice.*

Input voltage exceeding the nominal rating by over +/-10% will cause abnormal operation.

Note: This camera needs to connect to MDVR or DVR that supports AHD (Analog High Definition) system.


Caution:

1. In order to protect the camera, please avoid placing or using the camera under direct sunlight.
2. Please ensure that the input voltage range is within the specifications.
3. Please do not place the camera in a location with a temperature exceeding 50°C.
4. Do not attempt to service the camera by yourself, please refer all servicing to qualified Dealers.

Operation procedures:

1. Loosen the lock screws on the sun shield, remove the mounting bracket to the suitable position.
2. Attach the mounting bracket to the wall or ceiling, wherever you want to install the camera. Locate a wall stud or ceiling joint and secure the base by the supplied mounting screws.
3. Connect the 4 pin plug the MDVR and screw tight.
4. If required Snip the white loop to activate the Mirror feature.

Dimensions:

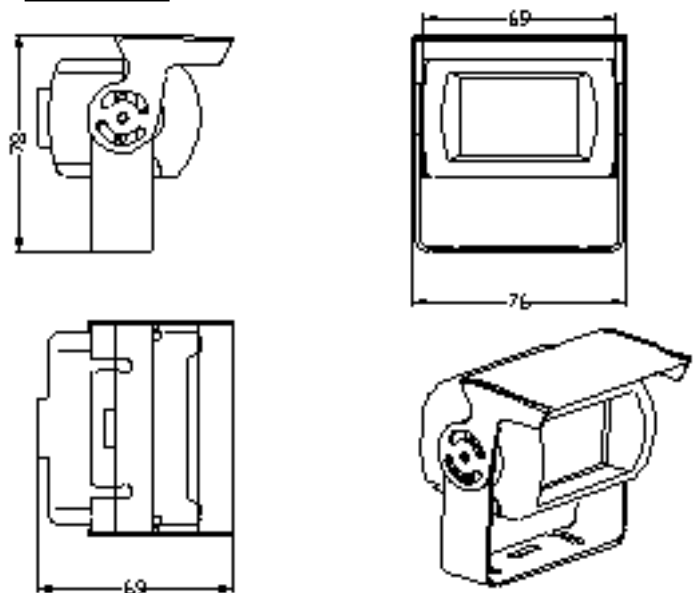

Connections:

